


INSTRUMENT
APPROACH
CHART - ICAO

AD ELEV 259 ft
HEIGHTS RELATED
THR RWY 12 - ELEV 260 ft

ATIS 123.900
APP 119.400
TWR 118.300

PONTA DELGADA, João Paulo II (LPPD)

RNP Z RWY12

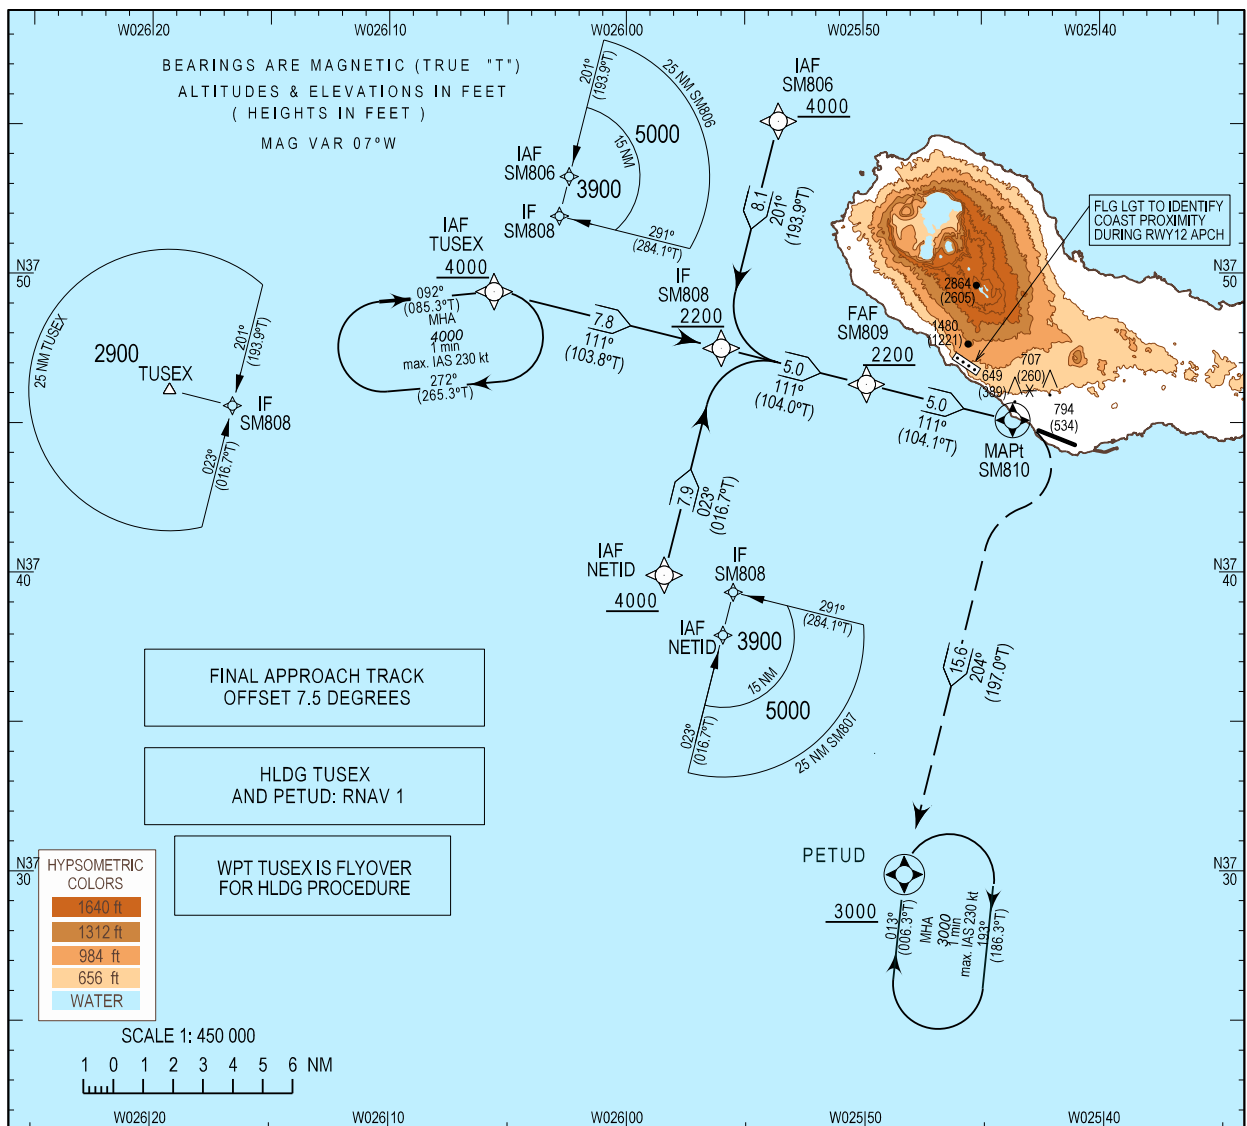


MISSED APPROACH:

Turn right to PETUD, climbing to 3000 ft.
At PETUD hold as published.
CTC Ponta Delgada Approach.

RCF:

Squawk 7600. Perform missed approach procedure.
At PETUD holding, climb to 4000 ft.
After completing one holding pattern at PETUD,
proceed to NETID to perform another RNP Z RWY12 approach.

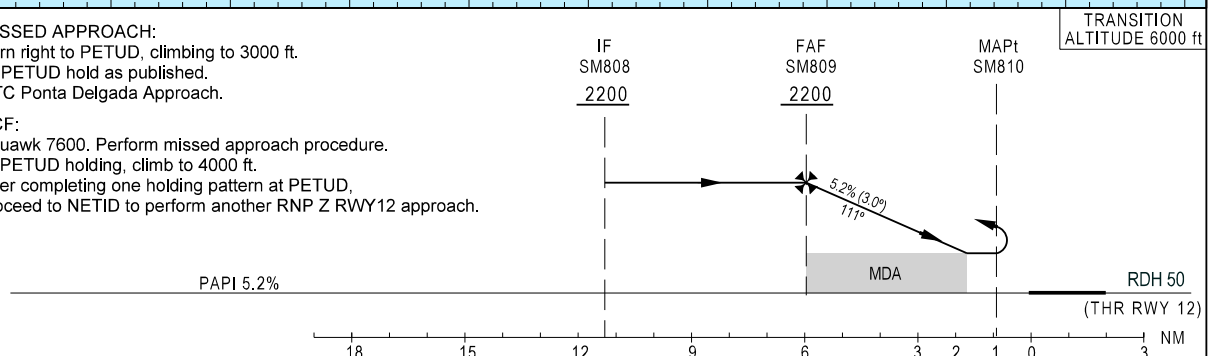

CAT	LNAV		CIRCLING	
	MDA/H	OCH	NORTH	SOUTH
A	880 (621)	611	NOT AUTHORIZED	880 (621)
B				
C	960 (700)	699		960 (701)
D				

DIST THR (NM)		6	5	4	3	2	1
Altitude (height)		2200 (1941)	1910 (1651)	1590 (1331)	1270 (1011)	950 (691)	630 (371)
Speed	(kt)	80	100	120	140	160	180
	(min:sec)	4:28	3:34	2:59	2:33	2:14	1:59
RoD (3°)	(ft/min)	430	530	640	750	850	960

New IAP.

Instrument Approach Procedure Coding Table											
LPPD RNP Z RWY12 (IAF1 SM806)											
Path Terminator	Waypoint				Course/Track MAG (True)	Dist NM	Turn Direction	Upper limit [ft]	Speed	VPA [°]/TCH [ft]	Navigation Specification
	Identifier	Type	Flyover	Coordinates				Lower limit [ft]			
IF	SM806	IAF	No	375525.71N	-	-	-	-	-	-	RNP APCH
				0255331.02W	-	-	-	4000	-		
TF	SM808	IF	No	374732.39N	201	8.1	-	-	-	-	RNP APCH
				0255558.29W	(193.9)		-	-	2200	-	

Instrument Approach Procedure Coding Table											
LPPD RNP Z RWY12 (IAF2 NETID)											
Path Terminator	Waypoint				Course/Track MAG (True)	Dist NM	Turn Direction	Upper limit [ft]	Speed	VPA [°]/TCH [ft]	Navigation Specification
	Identifier	Type	Flyover	Coordinates				Lower limit [ft]			
IF	NETID	IAF	No	373959.25N	-	-	-	-	-	-	RNP APCH
				0255849.09W			4000				
TF	SM808	IF	No	374732.39N	023	7.9	-	-	-	-	RNP APCH
				0255558.29W	(016.7)		2200				

Instrument Approach Procedure Coding Table											
LPPD RNP Z RWY12 (IAF3 TUSEX)											
Path Terminator	Waypoint				Course/Track MAG (True)	Dist NM	Turn Direction	Upper limit [ft]	Speed	VPA [°]/TCH [ft]	Navigation Specification
	Identifier	Type	Flyover	Coordinates				Lower limit [ft]			
IF	TUSEX	IAF	No	374925.22N	-	-	-	-	-	-	RNP APCH
				0260534.76W	-			4000			
TF	SM808	IF	No	374732.39N	111	7.8	-	-	-	-	RNP APCH
				0255558.29W	(103.8)			2200			

Instrument Approach Procedure Coding Table											
LPPD RNP Z RWY12 (IF-FINAL-MISSED)											
Path Terminator	Waypoint				Course/Track MAG (True)	Dist NM	Turn Direction	Upper limit [ft]	Speed	VPA [°]/TCH [ft]	Navigation Specification
	Identifier	Type	Flyover	Coordinates				Lower limit [ft]			
IF	SM808	IF	No	374732.39N 0255558.29W	- -	-	-	- 2200	-	-	RNP APCH
TF	SM809	FAF/FAP	No	374619.60N 0254951.15W	111 (104.0)	5.0	-	- 2200	-	-	RNP APCH
TF	SM810	MAPt	Yes	374506.36N 0254343.56W	111 (104.1)	5.0	-	- -	-	3.00° / 50 ft	RNP APCH
TF	PETUD	MAHP	Yes	372954.83N 0254819.91W	204 (197.0)	15.6	Right	- 3000	-	-	RNP APCH

Instrument Approach Procedure Coding Table											
LPPD RNP Z RWY12 (HLDG PETUD TUSEX)											
Path Terminator	Waypoint				Course/Track MAG (True)	Dist NM / Time min	Turn Direction	Upper limit [ft]	Speed	VPA [°]/TCH [ft]	Navigation Specification
	Identifier	Type	Flyover	Coordinates				Lower limit [ft]			
IF	PETUD	HM	No	372954.83N 0254819.91W	013 -	1 min	Right	FL140 3000	230 kt	-	RNP APCH
IF	TUSEX	HM	Yes	374925.22N 0260534.76W	092 -	1 min	Right	FL140 4000	230 kt	-	RNP APCH